

CP-7907WT-70H

Enviro 960H+ Infrared Camera



700TVL WDR with High Intensity IR LEDs & 6-50mm Varifocal Lens

- ☞ New 960H+ technology for unsurpassed picture clarity
- ☞ IP66 rated weatherproof housing
- ☞ LWDR technology for true low-light performance
- ☞ True day/night performance, utilizing a motorized IR cut filter
- ☞ 0 lux with IR on
- ☞ 35 IR LED built-in array with smart IR LED control and 2 high intensity LEDs for IR projection up to 230 feet
- ☞ Multi-language OSD with built-in joystick control
- ☞ 3-axis integrated wall mount for simple installation at any angle
- ☞ 12vDC or 24vAC dual voltage
- ☞ 3 1/2" (width) x 3 3/4" (height) x 11" (length)




Contact your Crest Representative today to learn more about this product!




Product Data: CP-7907WT-70H Enviro 960+ Infrared Camera

Front View



Side View

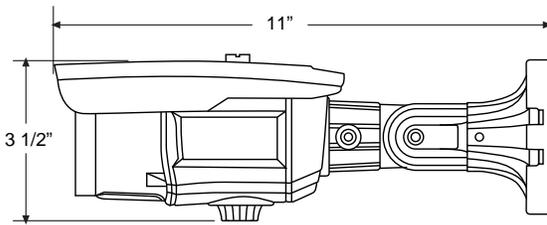

	CP-7907WT-70H
Model Number	CP-7907WT-70H
Image Pick-Up Device	1/3" Sony 960H Dual Scan CCD
Certifications	IP66
Horizontal Resolution	700 TV Lines (Color)
Minimum Illumination	0 Lux with IR LED on
S/N Ratio	More than or equal to 52dB
Auto Electronic Shutter	NTSC: 1/100 ~ 1/120,000s; On/Off/Manual/Auto
Auto Gain Control	Off/Low/Middle/High
Auto White Balance	ATW/Auto/AWC/Manual
Backlight Compensation	Off/WDR/D-WDR/BLC/HSBLC
Scanning System	2:1 Interlace
Gamma Characteristic	0.45
Lens Furnished	6-50mm DC Auto Iris Varifocal Lens
Synchronous System	Internal
Video Output	1 Vp-p / 75 ohms, BNC Composite
Infrared Luminary	Ultra Hi Power: 2 Pieces / 5PIE: 35 Pieces; Smart LED
Wave Length	850nm
Projection Distance	Up to 230 feet max
Power Supply	12vDC +/-10% / 24vAC Dual Voltage
Power Consumption	700mA min (Camera + IR LED on)
Operating Temperature	14 ~ 122°F / Max 90% RH
Dimensions	3 1/2"W x 3 3/4"H x 11"L

Specifications subject to change

