



DSK Application Site Survey

LED SAFETY LIGHT SYSTEMS

Date:

PO#

Company Name:

Project Name:

Contact Name:

Phone:

Email:

Door Type:	Enter door type or select from list		Height	Width
	Size:		x	
BrinkAlert Item Code:	Select desired item code from list		Enter number of doors below	
	# of doors:			
Door Operator Make:	Enter operator make or select from list		Enter operator model below	
	Model:			
Signal Type - AC or DC:	AC	DC	*NOTE: AC signal type requires AC Signal Converter for install	
Desired Track Style:	Select preferred style from list		Select only if multiple styles desired	
	1 st	2 nd		
Program for pre-announce?	YES	NO	Time:	If yes, enter number of seconds
OR				
Monitor safety eyes?	YES	NO	Type:	If yes, select type from list
				*NOTE: If client wants both options, contact tech support for guidance.
Notes/Special instructions:				

Sales Rep Signature

Date

Client Signature

Date

LED RETAINER TRACK OPTIONS

Unpainted 6061 aluminum, easy to cut and powder coat. Sold in 5ft sections. Pre-drilled service available.


*Commonly used on
rolling steel doors*

TRACKSNG5



*single flange track
(ships by default)*

TRACKDUAL5

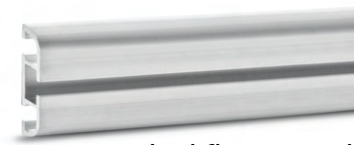

dual flange track

*Commonly used on
sectional doors*

TRACK905



*90° track with 1" extension
and 1" mounting area*


TRACK995



*90° track with
1" mounting area*

*Commonly used on
right-hand side of doors
with vehicular traffic*

TRACK455

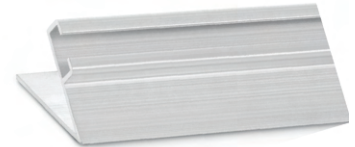

*45° track for angled or
indirect lighting*

NEMA BOX OPTIONS

High-quality 8"x6"x4" NEMA enclosure to protect electronics.

NEMABOX-8X6X4-CTRL-INSTALLED



Includes pre-installed LED controller and power supply. 480-110v transformer available.

NEMABOX-TIMER-PREANNOUNCE



Includes pre-installed LED controller and power supply. Also includes (2) programmable timers for timer-based control of overhead door close and flashing-amber lights (pre-announce).

OTHER AVAILABLE UPGRADES AND ACCESSORIES

High-Brightness LEDs

30% brighter than our other LEDs. Available in 12VDC and 24VDC (specific lengths).

AC Signal Converters

For LED Controller to use A/C input signals.

LED Lengths (cuttable)

1', 3', 5', 10', 10.5', 15', 20', 25'

LED Wiring Harnesses

Marine-grade tinned wire 22-4 conductors. Available in 4', 10', 20', 30', 40', 60', 80', 100'

Horns

Available with or without flashing red light.

Track Tape Kit

High-strength double-sided tape attaches to LED retainer track for easy installation.



LED SAFETY LIGHT SYSTEMS