




MEGATRON TANK

High-traffic Commercial
Brushless DC Swing Gate Operator
The Maximum Level of Gate Control

Super Heavy Duty
4500 lbs. Capacity

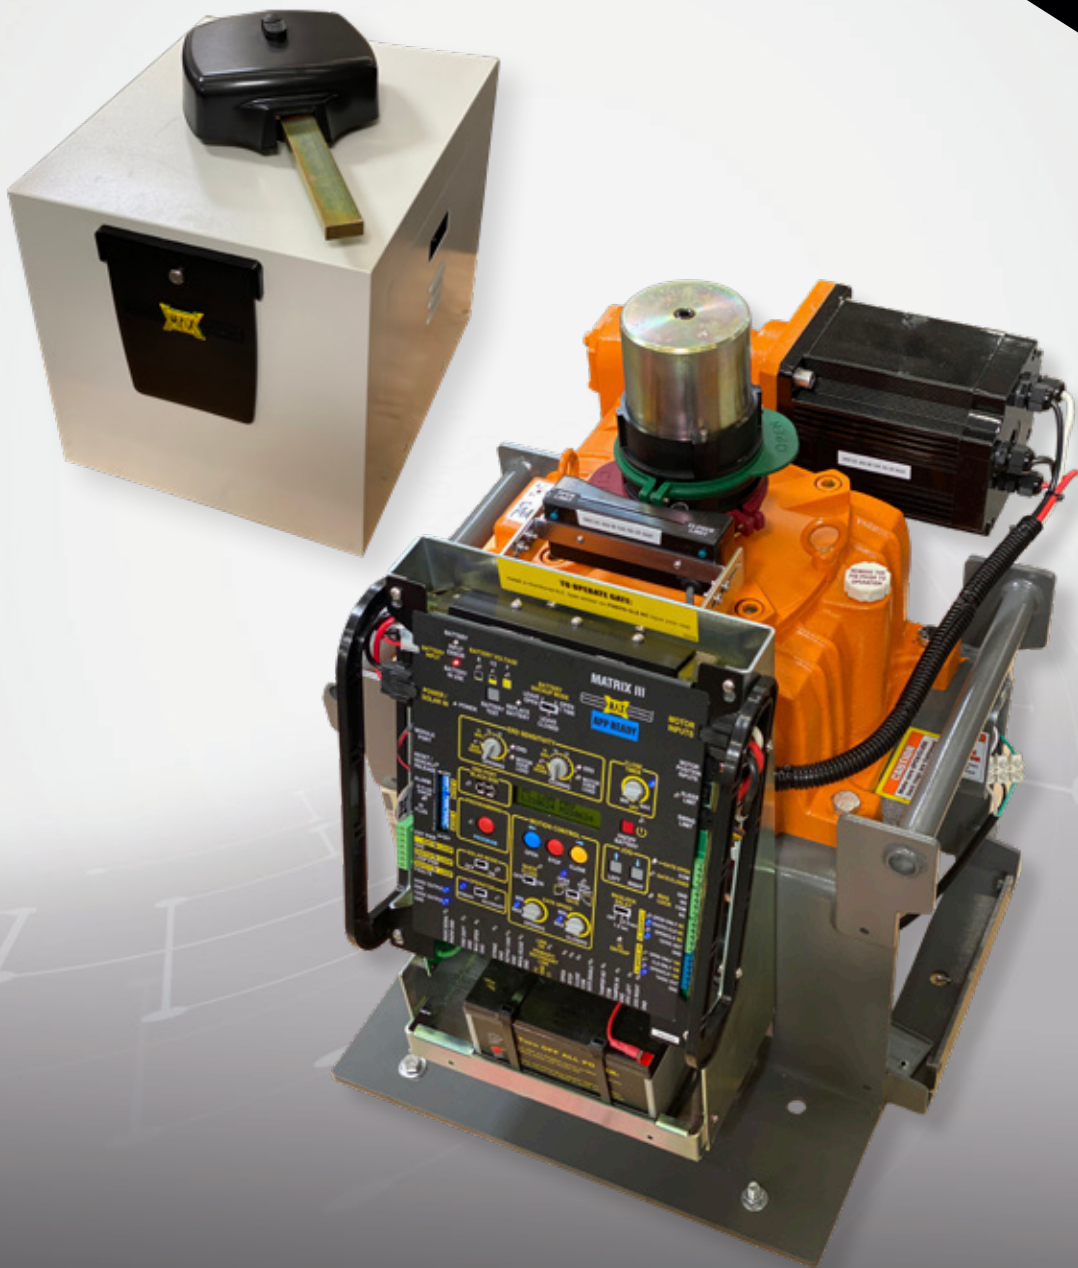

2 YEAR WARRANTY
PLEASE READ
WARRANTY POLICY

TRUE SECURITY... DSP MOTION CONTROL... HIGH PERFORMANCE
SAFETY SENSORS REQUIRED FOR UL 325 2018



MECHANICAL SPECIFICATIONS

- Max Megatron Tank dimensions (19.25 W x 23 D x 25 H) 22.5 arm height
- ✓ Heavy duty dual gear box 900:1 Size 100 for Megatron Tank - 120 lbs.
- Megatron Tank capacity 4500lbs /10ft or 3000lbs/30ft
- ✓ Large output shaft: 3¼" diameter solid steel with cast iron clamping system for all Megatron
- ✓ Direct gear drive (no chains, belts, or pulleys)
- ✓ Mechanical and electrical manual gate release functions
- Corrosion protection gold zinc coating and powder coating
- ✓ Continuous cycle at extreme temperature range; no overheating possibilities
- ✓ Intelligent ramp-up and ramp-down gate speed control for smooth operation
- Shipping weight of Max Megatron Tank (323 lbs)

ELECTRICAL SPECIFICATIONS

- ✓ 24V Brushless DC motor equivalent to 2.5 HP AC motor
- ✓ Programmable gate speed controls, 16 selectable speeds - gate speed 11.5 to 20 seconds for opening and closing
- ✓ Automatic gate position reset system
- ✓ Gate sync feature provides automatic gate movement synchronization
- Modular system design for ease of service
- Switchable 115/230 voltage selection and solar option
- ✓ Adaptive DSP control for advanced brushless DC motion control
- ✓ Real time performance analyzer and event log (OBD PORT and Black Box)
- ✓ Low voltage wiring capabilities for remote power up 500 ft (no battery needed)
- ✓ 'Solar Ready' battery module with built-in advanced solar regulator - optional Max solar pack
- Intelligent power management system with energy saver mode
- Built-in 12vdc and 24vdc outputs power
- ✓ Gold contact input connections and automobile grade connectors
- Selectable open timer 0 to 60 seconds with 'timer off' option
- -4°F to 158°F (-20°C to +70°C) operational temperature range including battery performance without needing a heater
- ✓ Robust lightning protection up to 20KVolts and 10KAmps on all inputs and outputs (44 channels) including loop detector input connections
- ✓ Tunable 16-position safety obstruction sensor, auto adaptable to gate weight and size
- Dual motor overcurrent safety shut-off for additional protection

✓ = Unique to Megatron Tank

- Every operator includes a batteries providing 200 cycles (dependent on gate site) in case of power failure
- Three modes of selectable battery backup functions
- ✔ State machine design electronics with ultra-fast microprocessor
- On-board three button station

SECURITY SPECIFICATIONS

- ✔ High-traffic intuitive loop management system for better security
- ✔ Advanced security features with built-in audible and remote alarms
 - Magnetic lock control relay outputs with selectable delay times
- ✔ Tamper alert relay output triggers "on" if gate is forced open
- ✔ Audible alarm if gate is tampered with or ERD is triggered for higher security
- ✔ Lockable cover with key lock release to prevent intruders and vandalism
- ✔ Gate disable feature, disables all inputs with exception of the fire department input for high security
- ✔ Built-in transaction buffer for higher security
- ✔ Gate status outputs for gate monitoring
- ✔ Direct motor control of jog OPEN/CLOSE for manually moving a gate in case of emergency
 - Advanced anti-tailgate features to provide higher security
- ✔ No need for magnetic lock with the robust output shaft and clamp design of the Megatron Tank

SAFETY SPECIFICATIONS

- Adaptive obstruction sensor for much better gate safety system. 16 selectable sensitivity settings
- UL 325/991 compliant Class I, II, III, and IV. CSA approved
- Pinch arm protection design
- ✔ Dynamic magnetic brake system stops the gate immediately to prevent damage to obstructions
- ✔ Built-in advanced entrapment protection and alarm output
 - Built-in gate-in-motion alarm for industrial applications

✔ = Unique to Megatron Tank

OPTIONAL

MAX CLOUD APP

Affordable and unique APP control solution for the residential and commercial gate operator market.
Compatible with Max Operators except Phantom F6 and 2000 Plus



  Smartphone · Tablet



VIRTUAL TRANSMITTER:

- To open or close a gate from anywhere in the world - via Max Cloud App
- Supports >10,000 virtual transmitters



QUICK & RELIABLE APP COMMANDS:

- App uses a dedicated cloud server to issue gate OPEN & other commands within a second.
- Cellular data connectivity is more reliable than WiFi due to range limitations.
- Cloud based app does not use text messaging which has unpredictable delays.



MANAGE GATE SITES USING MAX CLOUD APP:

- Add Admin users that can manage the gate site database.
- Add users with optional time restrictions
- Issue temporary Guest Passes for visitors
- With Max Keypad option: Program keypad keycodes, Wiegand keycodes for card readers, radio receivers and transponders with time restrictions
- Setup Auto Open / Close Timer for Max operators
- Retrieve Event log
- Retrieve Operator Diagnostics info: Error log



MULTIPLE GATE SITES SUPPORTED BY MAX CLOUD APP

- Gate sites can be controlled and monitored individually via app



SIMPLE AND SECURE APP LOGIN :


- Securely login to app using Cloud based authentication code. This avoids the need to remember passwords




USER FRIENDLY MENUS:

- Easy to program App Users & Guest passes with time restrictions.
All programming is done on Max Cloud App - not a website portal

MAX MEGATRON TANK

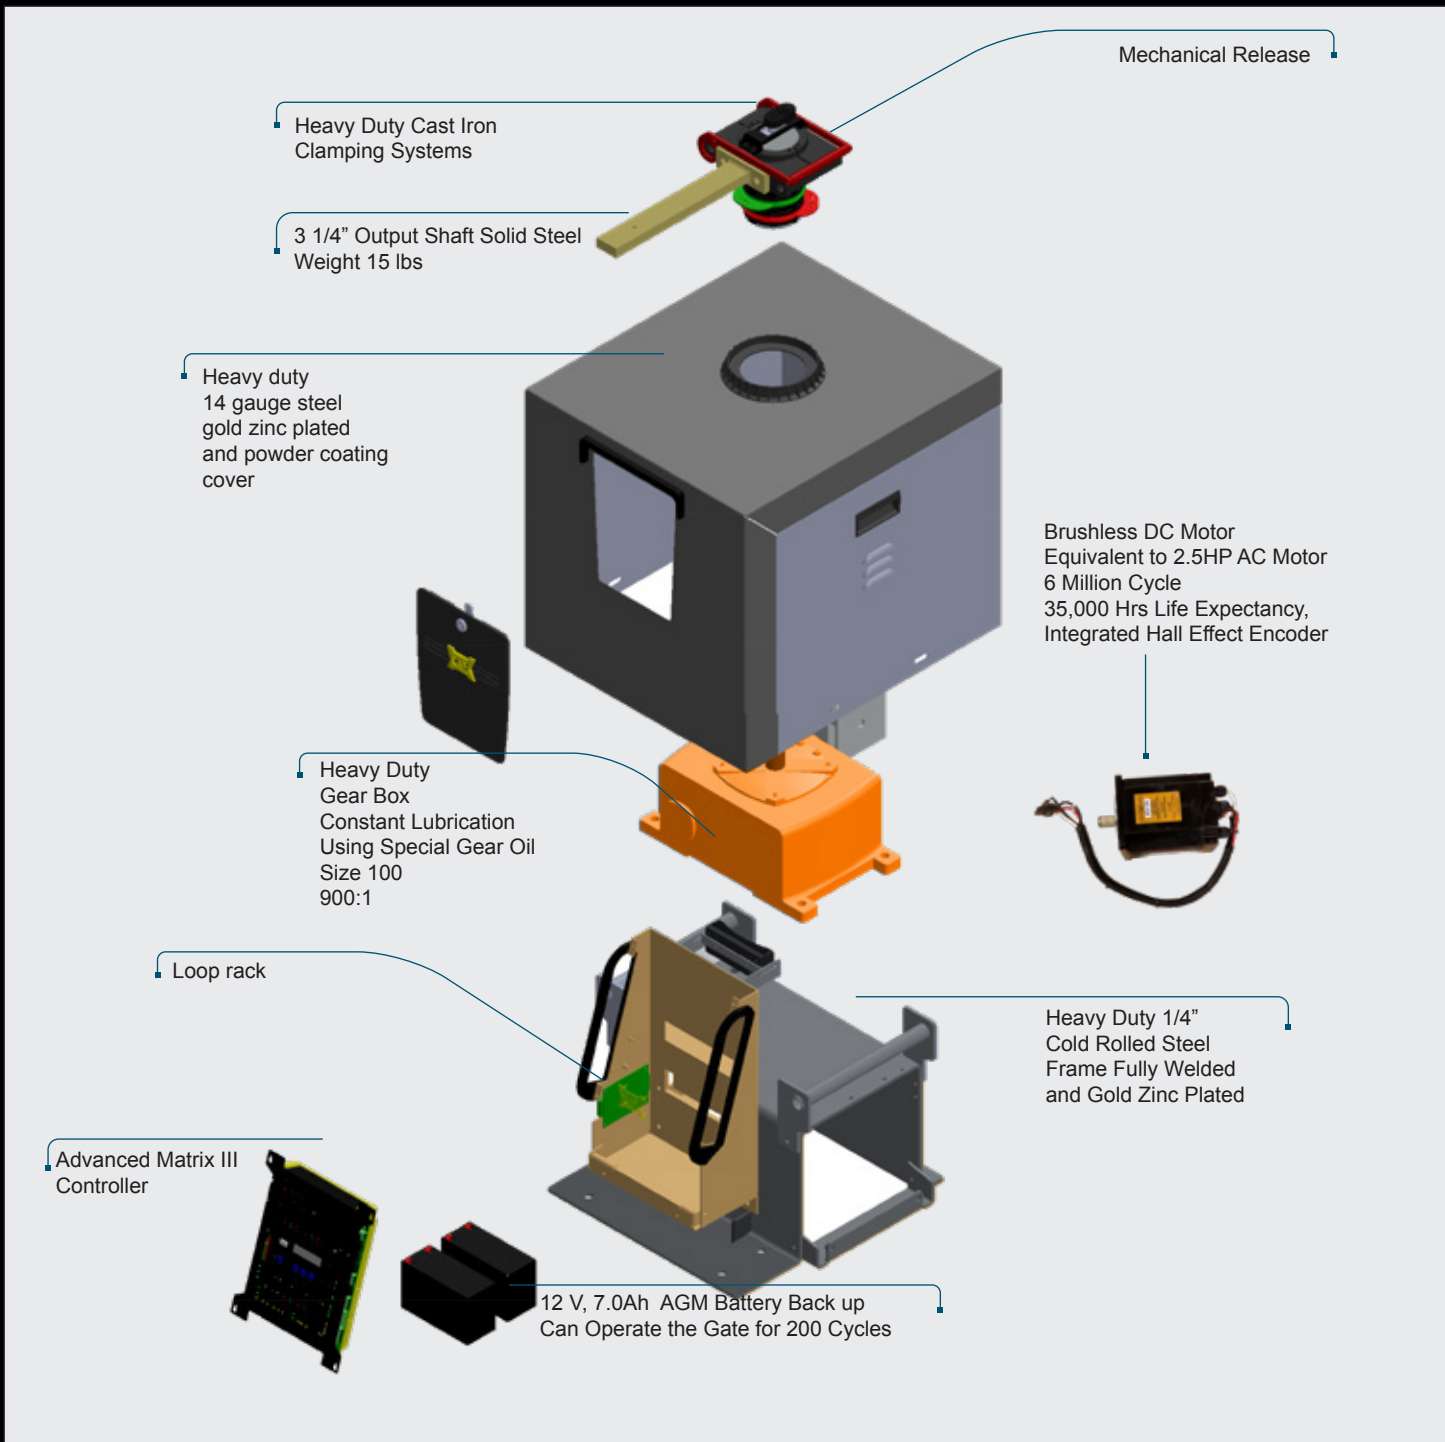


MECHANICAL RELEASE

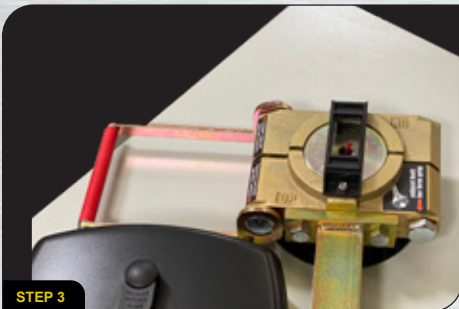

In case of a technical difficulty, the Megatron Tank has two manual release solutions. The first solution is the JOG OPEN & JOG CLOSE function. The JOG OPEN & JOG CLOSE function works by bypassing all Matrix-1 board inputs, serving as an electro-manual release solution even when the operator is not getting AC power but is still relying on battery backup. By installing an external "constant pressure switch" the JOG OPEN & JOG CLOSE feature can be accessed remotely.


The second solution is a mechanical manual release of the gate operator. Simply unlock the cap with a key, remove the cap and lift the red handle. The clamp is now loose and the gate can be pushed open manually. Manually releasing the operator in this manner will trigger the 'gate-tamper' relay. If the mechanical manual release is unauthorized, the gate tamper can trigger a security system. This is a high-security feature not found in any other gate operator.

OPTIONAL FEATURE Max External Jog Switch



VEHICLE HIT PROTECTION

Maximum Controls recognizes swing gates are more prone to vehicular collisions. For this reason the Megatron Tank is outfitted with Maximum Controls' clamping technology constructed with robust cast iron. The clamp grips onto a 3¼" diameter machined steel output shaft assuring maximum grip without the use of a shear pin/plate; allowing slippage in an event that the gate is struck while in motion by a vehicle. This prevents damage to the operator while preserving limit switch locations.

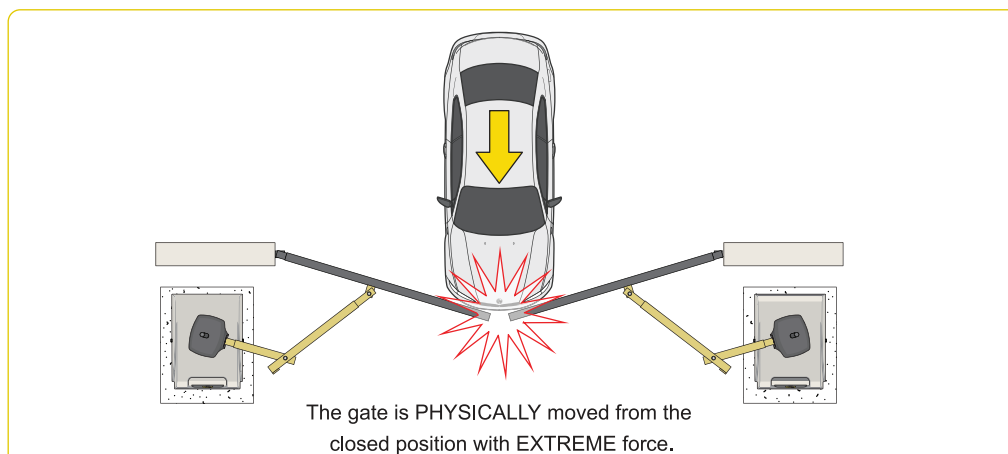

APPLICATION USE

4500 lbs for 10ft or 3000 lbs for 30ft



After ten years in business here 10 reasons Maximum Controls is a technological leader in the industry.

- App control gate operator for high security and access control
- Long motor life capable of 5 million cycles
- The most robust lightning protection available in the industry
- Branded reliability
- Dependable diagnostic tools, LCD display and USB download
- The quietest machines on the market
- Superior gate control and motion, true RPM ramp up, ramp down
- Reliable battery back up standard on all models
- Years of reliable operation in extreme temperatures, Phoenix to Winnipeg
- The only proven solution in windy conditions
- Direct gear drive, super quiet, minimum moving parts

These are just a few of many reasons you should consider Maximum Controls



GEARBOX

The Megatron Tank implements a size 100, 900 to 1, direct drive dual gear reduction, high efficiency cast iron gearbox.

This gearbox is highly efficient, producing maximum torque, maintaining a low amperage draw by reducing resistance, providing super silent operation. The rugged cast iron housing, bronze gears, and double sealed heat-treated solid shafts have been designed by a team with over 40 years of experience in the gearbox industry.

High speed ball bearings and a synthetic oil bath keep the dual gear reduction operating flawlessly through extreme temperature ranges without need for belts, chains, or pulleys which are subject to wear, raising maintenance issues.

We invite you to compare our Maximum Controls gearboxes to any of those used by other manufacturers.




BRUSHLESS DC MOTOR

The brushless DC motor in the Megatron Tank uses "Hall Effect" magnetic sensing to identify over five thousand precise rotational positions during 90 degrees of gate movement. That's over 50 samples per degree of gate travel. Using this positional feedback, intelligent ramp-up and ramp-down of the gate speed is employed to minimize stress on all mechanical components.

The Hall Effect sensors know the position of the gate at any given moment thus can synchronize the gates to open and close at the same speed. We combine this technology with a dynamic magnetic brake system which stops the gate instantly when colliding with an obstacle.

Our brushless DC motors can withstand and operate in extreme high temperatures up to 158°F (+70°C); this surpasses any other motor technology we know of in the market today.

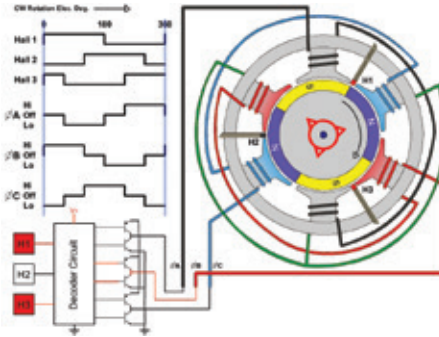

The Max brushless DC motor's torque is equivalent to a 2.5 HP AC output torque motor and can operate approximately 35,000 hours, (about 6 million cycles). Therefore, the motor will last for decades to come.

Brushless motors controlled by DSP is the same motor technology used in advanced robotics for automobile assembly.



MOTOR CONTROL TECHNOLOGY

Maximum Controls' brushless dc motor control enables precision movement that traditional brushed motors can not replicate. Advantages of this level of control is the ability to stop instantly - which is critical in emergency situations when a safety edge is struck, stopping on a dime to reduce risk of injury or damage to equipment is imperative.

ADVANTAGES OF BRUSHLESS DC MOTOR

| FEATURE | BRUSHED DC MOTORS | BRUSHLESS DC MOTOR MAX |
|------------------------------|--|--|
| Commutation | Mechanical | Electrical |
| Maintenance | High | Very Low |
| Electronic Noise EMI | High | Super Low |
| Life | Short | Much Longer 6,000,000 Cycles |
| Speed/Torque Characteristics | Moderately Flat | Flat (Enables Operation at All Speeds) |
| Efficiency | Medium | High |
| Motor Speed | Limited Speed Control | Variable Speed Control |
| Audible Noise | High at High Speeds Because of Brushes | Super Quiet |
| Drive Complexity | Inexpensive | Advanced DSP Control |
| Loss of Torque Due to Aging | Yes | No |
| Energy Consumption | Higher | Lower |
| Magnetic Hall Sensors | No | Yes (50 samples per degree of gate travel) |


POWER SUPPLY

The Megatron Tank's power supply utilizes a 30 Amp torroid and power management board.

The power supply is efficiently designed with ample headroom and is not overstressed under any extreme load or temperature conditions. The power supply input accepts 115V or 230V AC via selection switch. During gate operation the battery is not utilized while AC is present, preserving the life of the battery.

Input AC Power/Amps -

Switchable: 115VAC / 6 Amp, Single Phase
or 230VAC / 2 Amp, Single Phase

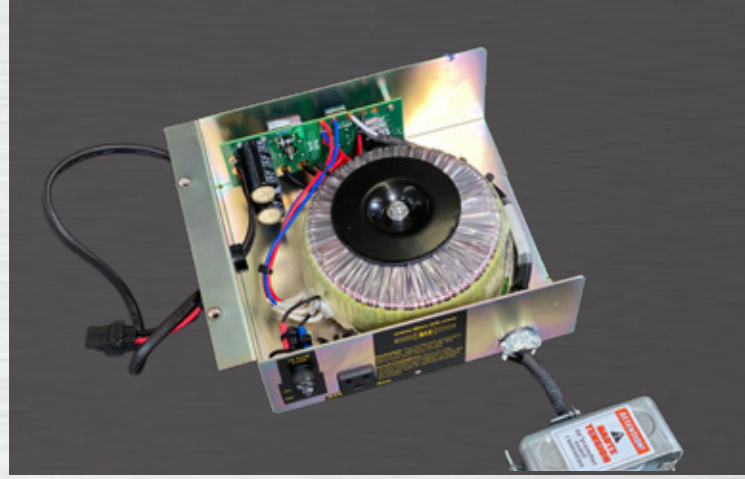


BLACK BOX, LOOP MANAGEMENT & SECURITY

One of the primary goals of the Megatron Tank is to provide the most secure, easiest to maintain gate operator with higher gate speed motion and advanced loop management.

The Megatron Tank uses non-volatile memory to continuously log performance characteristics and input/output events. A service technician can access this data via USB port to download the event history, quickly diagnosing complex or intermittent problems that traditionally have been very difficult to isolate and repair. By plugging a USB thumb drive into the USB port, all the Megatron's diagnostic history will download, working as a "Black Box" to diagnose what occurred. The Megatron's event history is stored as a .TXT document which can be emailed to the factory if necessary, for on-site diagnosis. The .TXT file is a log of the most recent 1000 events reported by each module to the central logger.

The Megatron Tank's standard intuitive loop management system, when enabled, will discourage tailgating, increasing security for residential and High-traffic installations. When the anti-tailgate switch is activated, any car tailgating a legitimate access will be forced to stop by a rapidly closing gate, forcing the tailgater to back up and thereby triggering the gate to close and deny unauthorized access.

When disabled, loop management will allow multi-access, with the gate opening on each successive trigger in the traditional loop management manner.

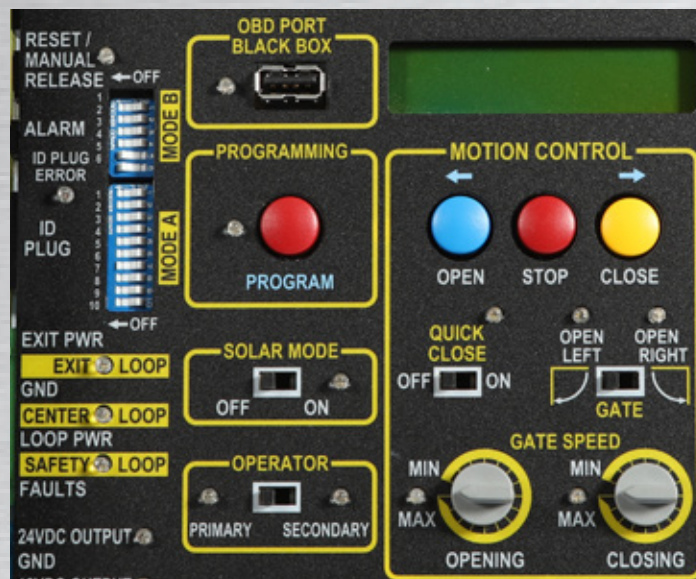


ADVANCED SECURITY FEATURES


Anti-Vandalism/Burglar Alarm

As a security device, the Megatron Tank supplies a gate tamper relay output that triggers whenever a gate has encountered an unauthorized movement. This can be configured to activate an alarm system or camera. The Megatron Tank also has a gate disable feature which can disable operator open commands during a vacation or overnight for commercial applications.

CONTROL FEATURES AND CONNECTIONS

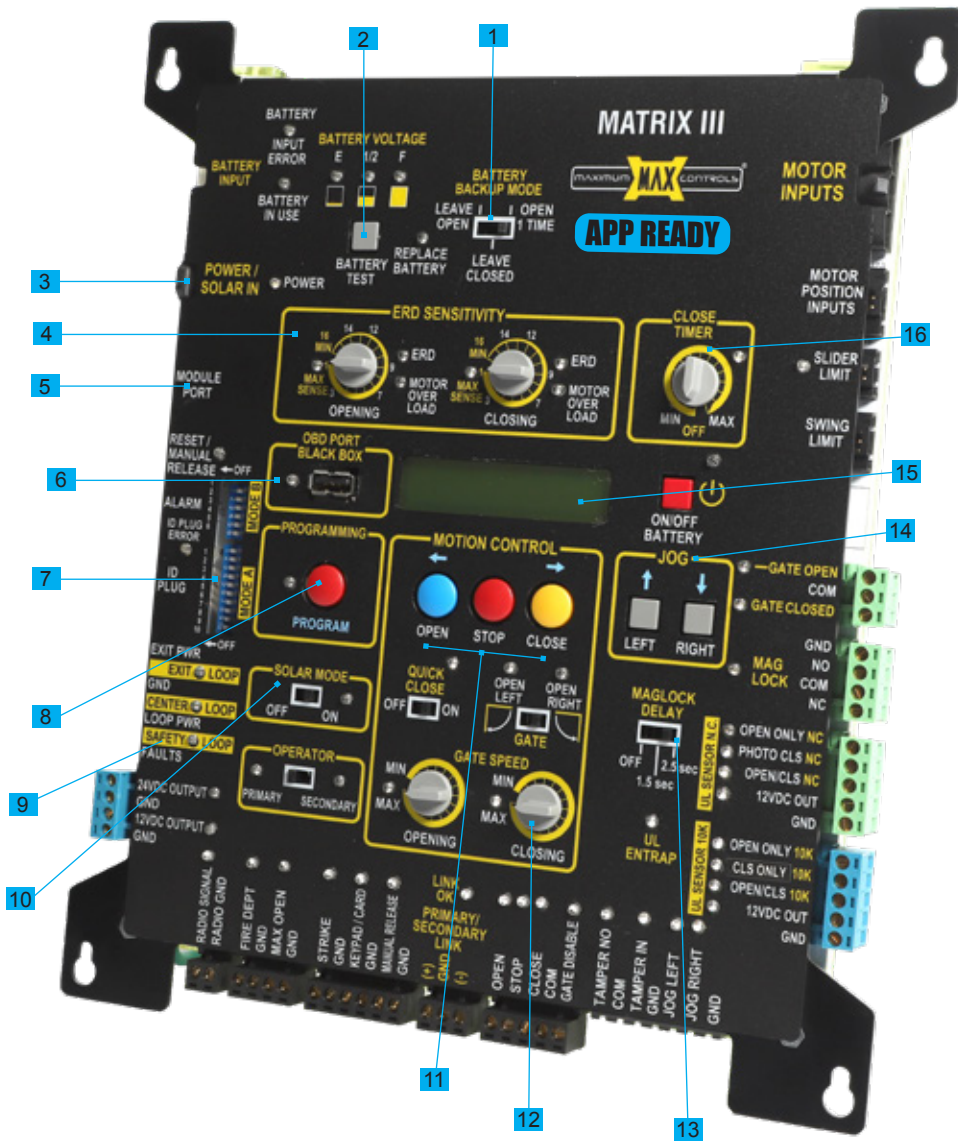

1. Battery Backup Mode Switch
2. Battery Test Switch
3. Solar Pack Input
4. ERD Sensitivity
5. Module Port
6. OBD Port
7. DIP Switches
8. Program Button
9. Loop Status
10. Solar Mode Application
11. Motion Control Buttons
12. Closing gate speed
13. Maglock Delay
14. Jog Open/Close
15. LCD Display
16. Close Timer Switch

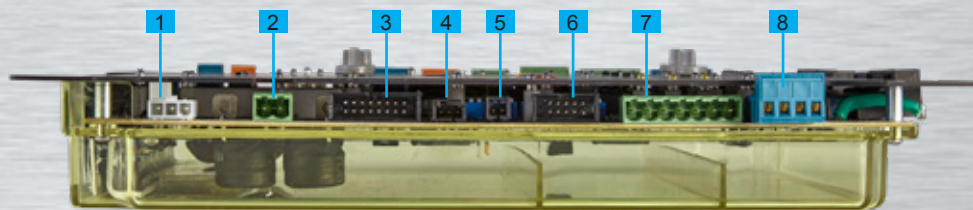

- | | |
|----------------------|---|
| 1. Battery Input | 5. UL Alarm |
| 2. Power/Solar Input | 6. ID Plug |
| 3. Module Port | 7. Loop Rack Input |
| 4. Reset | 8. 12vdc & 24vdc limited current power output |

LIGHTNING PROTECTION



The Megatron Tank offers the most robust lightning protection available in the industry. The Megatron Tank protects all peripheral inputs, loop inputs, power inputs, relay outputs, and all communication lines (over 44 channels of protection) in 1/1,000,000,000 of a second. With special emphasis on power supply protection, the Megatron Tank is guaranteed to withstand any lightning hit more than 50 feet away. Truly protected like no other operator in the world. The operator must have a properly installed ground rod for the lightning protection to work properly.

Maximum Controls LLC Warranty and Return Policy Megatron Tank

Section I Coverage

- a. 2 years on all components
- b. 1 year on batteries

Section II Not Covered

- a. Damages due to flooding
- b. Damages due to fire
- c. Damages due to negligence i.e. leaving the cover off in the rain, improper wiring of AC or peripheral systems
- d. Damages due to product misuse i.e. gate and operator combination mismatch
- e. Damages due to vandalism

Section III RMA Shipping Policy

- a. Maximum Controls LLC will pay for return shipping via standard ground UPS or USPS FOB CA on all RMA's within one year of Distributor's purchase
- b. Any form of "Expedited Shipping" on any RMA will be paid by Distributor

Section IV Product Returns

- a. Products must be in original, resalable condition with all warranty information, manuals, and original packaging.
- b. A re-stock fee of 10% will be charged on all returned products.
- c. All returned products must reference a Maximum Controls RMA number or it will be refused.
- d. Maximum Controls is not responsible for freight charges associated with returned merchandise.



