

CSL24ULWK SLIDE GATE OPERATOR

SECTION 32 31 00



KEY FEATURES

BATTERY BACKUP	Yes
REMOTE CONTROL ACCESS	Security+ 2.0® 3-channel receiver will handle up to 50 remote controls (unlimited remotes with 811LMX/813LMX)
INTERNET CONNECTIVITY	myQ® technology monitors and controls the operator through the myQ app
MONITORED SAFETY INPUTS	6 inputs (main and expansion board)
SOLAR-POWER CAPABILITIES	Yes
DIAGNOSTIC DISPLAY	LED diagnostic display
WIRELESS DUAL-GATE COMMUNICATION	Eliminates expensive conduit costs and unsightly driveway scars
POSILOCK®	Automatically powers the operator and returns a gate to the closed position when gate is pushed off of closed limit
FIRE DEPARTMENT COMPLIANT	Allows gate to auto open upon loss of AC power or battery depletion
LIMIT SETTING	Electronic
PROGRAMMABLE AUXILIARY RELAYS	Easily add additional features, such as warning lights/alarms
UNAUTHORIZED ACCESS PREVENTION	Can be programmed with anti-tailgate or quick close capabilities
HOMELINK® COMPATIBLE	Version 4 and higher

SPECIFICATIONS

OPERATOR SPEED	12 in. per second
POWER	120V/230VAC single phase
ACCESSORY POWER	24VDC, 500mA output; switched and unswitched power
OPERATOR WEIGHT	140 lbs.
WARRANTY	5 years commercial, 7 years residential
TEMPERATURE SPECIFICATIONS	Without heater: -4°F (-20°C) to 140°F (60°C); with optional heater: -40°F (-40°C) to 140°F (60°C)
UL USAGE CLASSIFICATION	UL 325 & UL 991 listed – class I, II, III and IV

CONSTRUCTION


MOTOR	24VDC motor with soft start/stop
OPERATOR DUTY RATING	Continuous duty
CHASSIS/FRAME	Constructed with 1/4 in. black powder-coated steel for rust prevention
GEAR REDUCTION	10:1 worm gear reducer in synthetic oil bath
CHAIN	#41 black oxide (60 ft. included)
COVER	High-density, UV-resistant polycarbonate 2-piece cover for excellent heat and corrosion resistance
RECOMMENDED CAPACITIES	Rated for gates up to 50 ft. in length or weighing up to 1,500 lbs.




CSL24ULWK SLIDE GATE OPERATOR

SECTION 32 31 00

DIMENSIONS

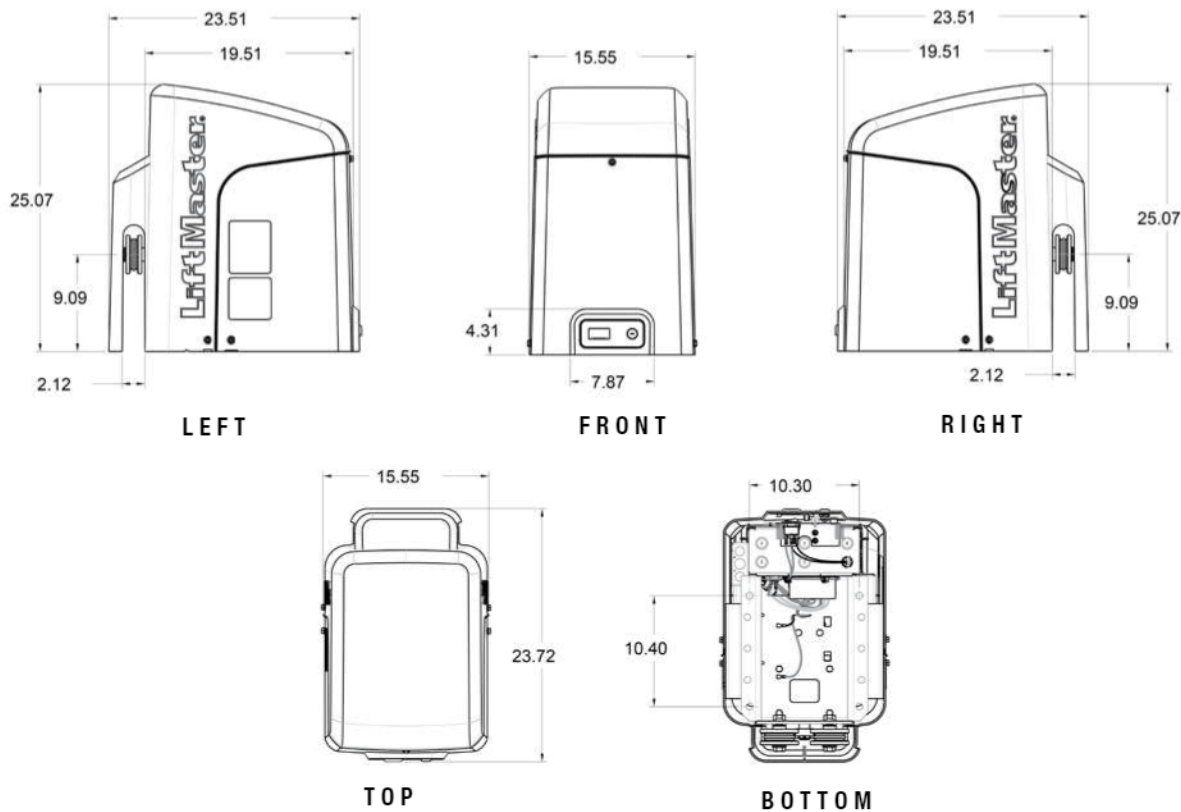

CAPACITY

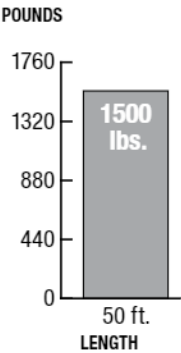

PACKED-IN ACCESSORIES

MODEL	DESCRIPTION
LMRRUL	Monitored Retro-Reflective Photo Eye
S505AL	Monitored Small Profile Resistive Edge
LMWEKITU	Monitored Wireless Edge Kit