

# LA500PKGUL SWING GATE OPERATOR

SECTION 32 31 00



## KEY FEATURES

BATTERY BACKUP	Yes
REMOTE CONTROL ACCESS	Security+ 2.0® 3-channel receiver will handle up to 50 remote controls (unlimited remotes with 811LMX/813LMX)
INTERNET CONNECTIVITY	MyQ® technology monitors and controls the operator through the MyQ app
MONITORED SAFETY INPUTS	3 inputs main board; 3 optional expansion board
SOLAR-POWER CAPABILITIES	Yes
DIAGNOSTIC DISPLAY	LED diagnostic display
WIRELESS DUAL-GATE COMMUNICATION	Eliminates expensive conduit costs and unsightly driveway scars
FIRE DEPARTMENT COMPLIANT	Allows gate to auto open upon loss of AC power or battery depletion
LIMIT SETTING	Electronic
DUAL-GATE CONTROL	Bi-part delay or synchronized close
PROGRAMMABLE AUXILIARY RELAYS	Easily add additional features, such as warning lights/alarms
UNAUTHORIZED ACCESS PREVENTION	Can be programmed with anti-tailgate or quick close capabilities
HOMELINK® COMPATIBLE	Version 4 and higher

## SPECIFICATIONS

OPERATOR SPEED	90-degree opening in 17 seconds
POWER	120V/230VAC single phase
ACCESSORY POWER	24VDC, 500mA output; switched and unswitched power
OPERATOR WEIGHT	Actuator arm 35 lbs.; standard control box 13 lbs.; includes (2) 7Ah batteries
WARRANTY	2 years
TEMPERATURE SPECIFICATIONS	-4°F (-20°C) to 140°F (60°C)
UL USAGE CLASSIFICATION	UL 325 & UL 991 listed – class I, II, III and IV

## CONSTRUCTION

MOTOR	24VDC motor with soft start/stop
OPERATOR DUTY RATING	300 cycles per day
CHASSIS/FRAME	Commercial-duty aluminum die-cast housing
GEAR REDUCTION	Precision-machined all-metal gear in contained lubrication housing.
RECOMMENDED CAPACITIES	Rated for gates up to 18 ft. in length or weighing up to 1,600 lbs.

DATA SHEET  
SWING GATE OPERATOR





**LiftMaster**

# LA500PKGUL SWING GATE OPERATOR

SECTION 32 31 00

## DIMENSIONS

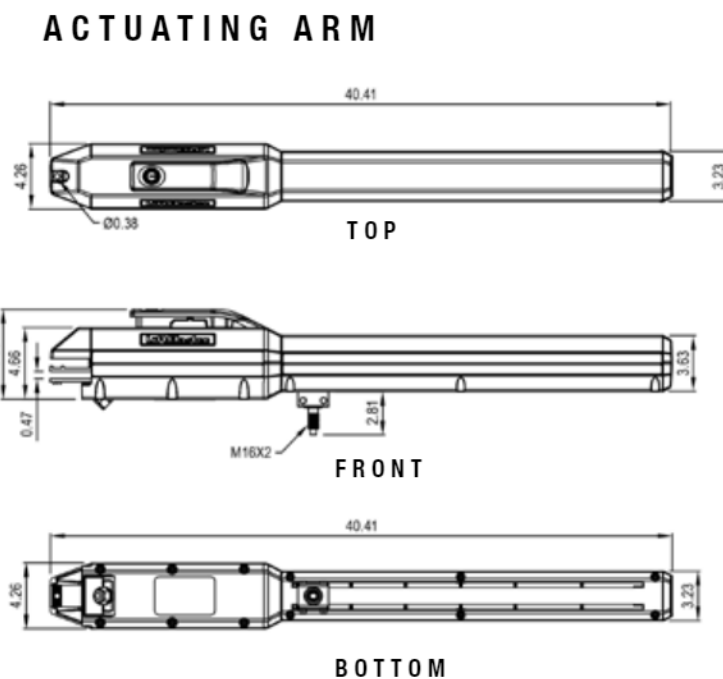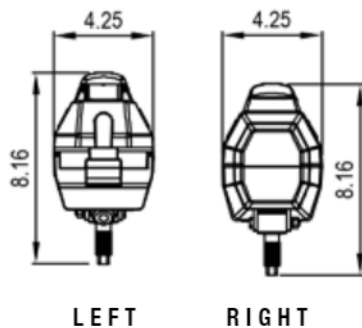

## CONTROL BOX

