

Passive PoE Splitter and Injector


NJ-P101M-PQ

ENFORCER Passive PoE Splitter and Injector is designed to support up to 100Mb/s networks and is compatible with all DC powered and non-POE devices up to 50VDC.



Features:

- Includes splitter and injector
- Works with all DC powered non-POE devices up to 50VDC
- Supports up to 100Mb/s networks
- · Plug & play installation
- Use existing Cat5e/6 wiring to extend power to non-PoE devices
- For distances up to 328ft (100m)

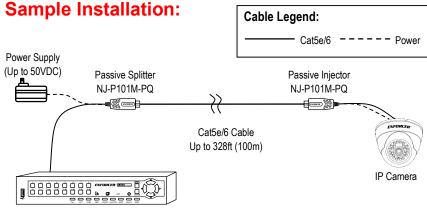



Specifications:

Model	NJ-P101M-PQ	
Transmission Medium	Cat5e/6 UTP	
Input Voltage	≤50VDC	
Transmission Distance	328ft (100m) max	
Transmission Current	1A max	
Working Temperature	14°~158°F (-10°~70°C)	
Storage Temperature	-22°~158°F (-30°~70°C)	
Humidity	0 to 95%	
Dimensions	2 ¹ /16 [°] x1 ¹ /8 [°] x ¹³ /16 [°] (52x28x21mm)	
Dimensions	With 5.9" (15cm cable)	

Also Available from SECO-LARM®:

	And	1
Passive VGA Balun	Passive Video Baluns	HDMI to VGA Converter
MVE-SV010Q	EB-P501-01Q	MVA-HV01Q
HDMI Extender over Coax	CCTV Power Supplies	Ethernet over Coax w/ PoE
MVE-AA11-01NQ	EVP-1SA4P9UL	NE-AE01-030TQ

(E 🕀

16842 Millikan Avenue, Irvine, CA, 92606 **Phone:** (949) 261-2999 | (800) 662-0800 **Fax:** (949) 261-7326 **Website:** www.seco-larm.com **Email:** sales@seco-larm.com

SECO-LARM[®] U.S.A., Inc.

Copyright 2015 © SECO-LARM U.S.A, Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints. SECO-LARM® ENFORCER® CRIWEBUSTER CBA SLI

PI_NJ-P101M-PQ_151216