

Commercial Door Kit - Two Door

- Power and door control solution for 12V
- Includes two Sure-Fi SFK-DS004 Wiegand Bridge system
- Connect to any local power, 85-305Vac range
- 12Vdc 5.0A Power supply
- 12Vdc battery Charger/UPS (batteries not included)



Sure-Fi Wiegand Wireless Bridge

Works with any Wiegand protocol up to 64 bits


1 Wiegand inputs

2 relay Outputs (Wet or Dry)
Request to exit input (REX)





Side View

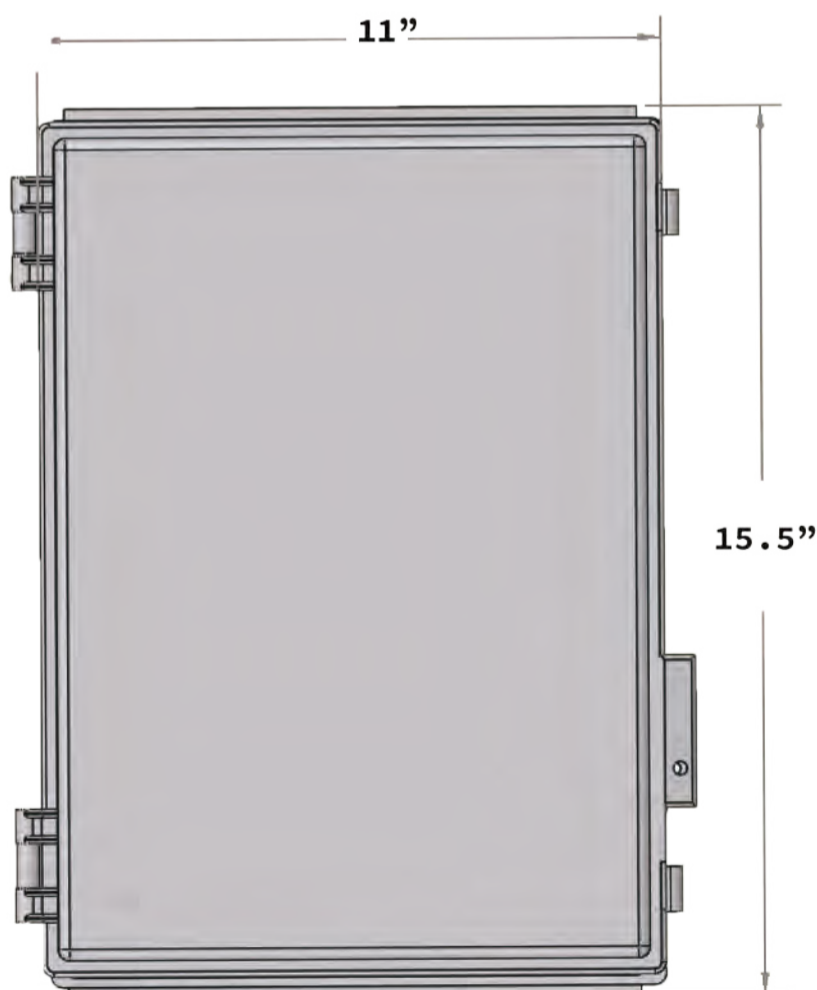

Top View

SPECIFICATIONS

Enclosure

- 15.5" x 11" x 5.25"
- UL-50 / cUL Listed enclosure
- NEMA Type 3, 3R, 35, 4, 4x, 6/6P, 12 & Marine Use IP68 enclosure

Power

- 12Vdc 5.0A / 24VDC 2.5A power supply
- Input Voltage 85~305Vac
- Max Power 60 Watts
- 12VDC / 24VDC battery chargers / UPS (batteries not included)
- Wiring block for quick connection to 12VDC and 24VDC devices