


36 CELL
MONOCRYSTALLINE MODULE

50W
POWER OUTPUT

20.00%
MODULE EFFICIENCY

5%
POSITIVE TOLERANCE

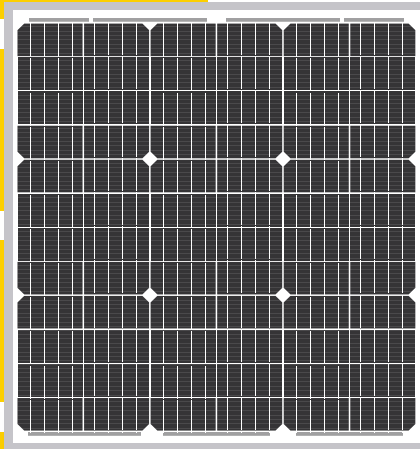

SLP050S-24U

High Efficiency Monocrystalline PV Module

- Nominal 24V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Designed to withstand high wind pressures, hail and heavy snow.
- Quality aesthetic appearance.



High Efficiency

Module Efficiency improved through advanced cell technology and manufacturing capabilities



High PID Resistance

Advanced cell technology and qualified materials lead to high resistance to PID




Withstands Harsh Environment

High PID resistance
5400 Pa positive load
2400 Pa negative load
Salt mist (IEC 61701)



Performance Warranty

10 years
Product Warranty

25 years
Power Warranty

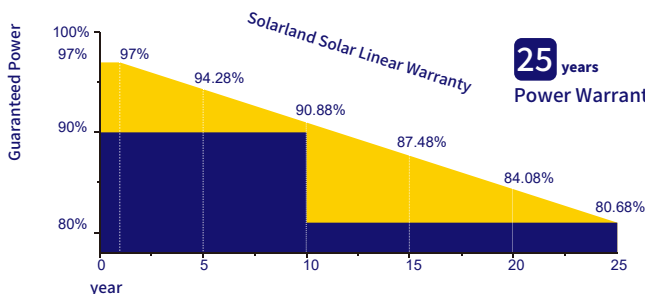

Positive mechanical load	>5400Pa
Positive Power Tolerance	0~+5W
Warranty Information	2 Year Product Warranty and Workmanship

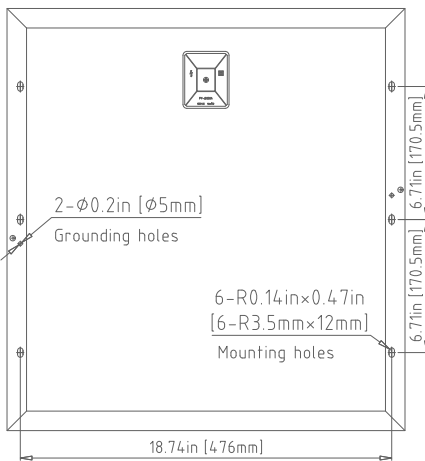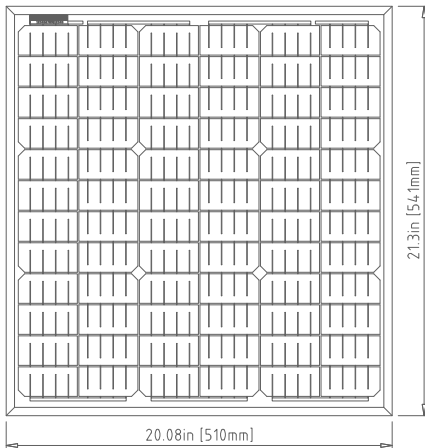


Dimensions in brackets are in inches.
Un-bracketed dimensions are in millimeters.
Unit: mm[in.]


Electrical Characteristics	SLP050S-24U
Product code	050032401A
Maximum power (Pmax)	50W
Voltage at Pmax (Vmp)	41.68V
Current at Pmax (Imp)	1.20A
Open-circuit voltage (Voc)	48.09V
Short-circuit current (Isc)	1.27A
Temperature coefficient of Voc	-(80±10)mV/°C
Temperature coefficient of Isc	(0.065±0.015)%/°C
Temperature coefficient of power	-(0.5±0.05)%/°C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	1000V DC
Power tolerance	± 5%

*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C
*NOCT: Nominal operating cell temperature (the data is only for reference)

Specifications	SLP050S-24U
Cells	Monocrystalline silicon solar cell
No. of cells and connections	36(6X6)
Module dimension	541mm[21.30in.]x510mm[20.08in.]x30mm[1.18in.]
Weight	3.28kg[7.25lbs]
Packing information(Carton)	590mm[23.23in.]x560mm[22.05in.]x80mm[3.15in.]/(1pc/ctn)




Junction Box
Top View (Lid Open)



Section A-A

Characteristics

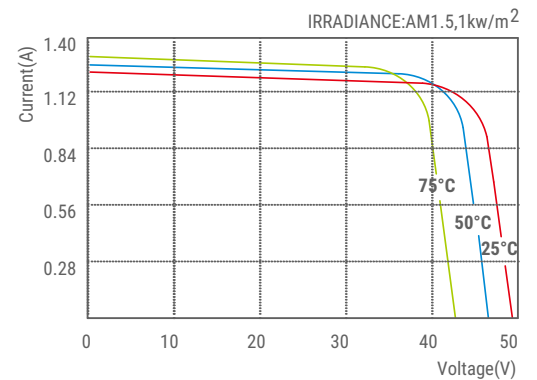

SLP050S-24U I-V Curves