MULTI-TENANT

WATCHMAN®
Your Virtual Security Guard

ADVANCED TELEPHONE ENTRY with
LIVE STREAMING VIDEO

W462
model

With one-step network connectivity
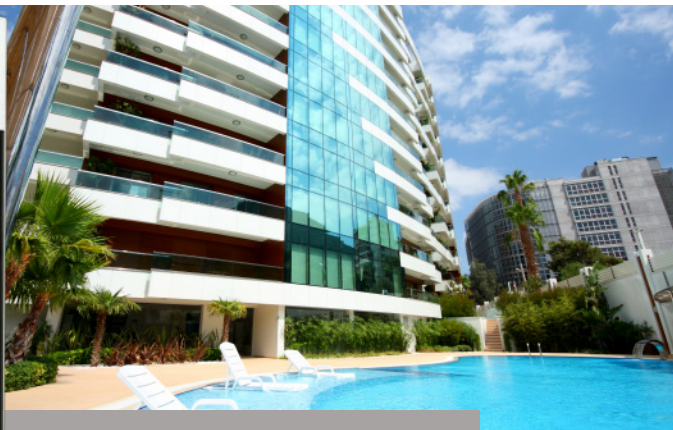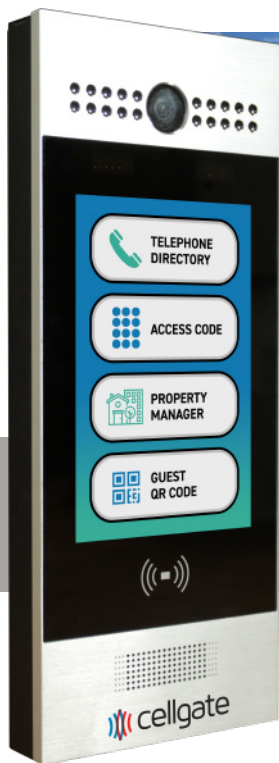
W462
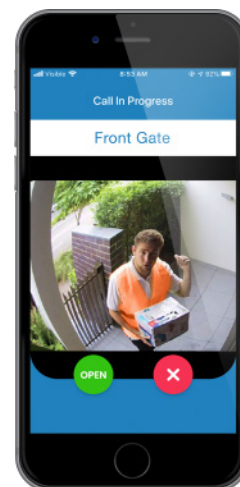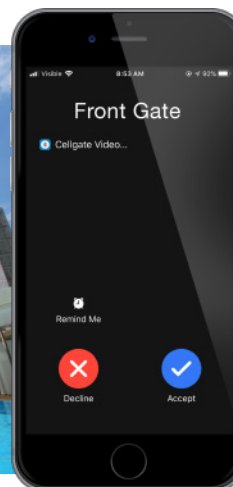**ONE STEP NETWORK CONNECTIVITY**
- Does not support Cellgate external cameras

Surface Mount
AA1MSE VPN

Flush Mount Kit
ENC-WFM1002

CELLGATE EXCLUSIVES

- **Multiple contacts per call group**
Calls up to 6 app video contacts and 3 voice-only numbers per directory listing

- **Voice Mail Intelligence - VMI**
System ignores call when reaches voice mail and continues call tree

- **Prop open notification** if gate is left open more than 3 minutes

NEW W462 FEATURES

QR CODE VISITOR MANAGEMENT

SMART SCREEN CALL MANAGEMENT

On-Site Network Configuration
No need to confirm DHCP or static IP addresses prior to installation. POE compatible.

QR Code Visitor Management
Visitors can receive QR code invites with restricted date/time access on their smart phones.

Smart Screen Call Management
Customizable touch screen call options, for improved visitor management.

ADDITIONAL FEATURES
- Brilliant 7.5" color touchscreen
- Built-in HID card reader
- 1 native 26-bit Wiegand expansion port
- Up to 1,500 directory listings
- 10,000 local codes and 64,000 non-local codes

cellgate

powered by: ethernet

1.855.MY.GATES

cell-gate.com

MULTI-TENANT

WATCHMAN®
Your Virtual Security Guard

W462
model
With one-step network connectivity

Gold Key Service

- Dedicated team for multi-tenant property management support
- Included with your service subscription at no charge
- Both personalized and video training
- TrueCloud™ portal and CellGate app support
- Ongoing support for the life of your account

Tenant Benefits

- See live video of visitors on telephone entry
- QR code visitor management
- Easy to use CellGate iOS/Android app
- Tenant managed call groups
- Peace of mind and convenience

SPECIFICATIONS

HD Camera angles:
　Horizontal: 120°
　Vertical: 64°

Power
　Power Consumption (12v DC): 1A
　POE compatible

1 – Wiegand Expansion Port (26 bit)

3 Relays:
　Contact rating: 0.5A @ 125vAC, 3A@30v DC
　Switching voltage: 277v AC, 220v DC
　Switching current: 4A

3 Digital inputs

IP65 - outdoor rated

Operating Temperature
　　　-20°C - 55°C　　-4°F - 131°F

Dimensions - Surface Mount
　Height-　324mm (12.8")
　Width-　130mm (5.1")
　Depth-　27mm (1.1")
All electronics are mounted inside, no external box/wiring needed.

Internet – one step network connectivity
　VoIP (no additional service required)
　Full-time IP connection

Included in box
　Watchman W462
　Power supply – 5A
　Magnetic switch
　Installation manual & user manual

Mounts available:
　Surface Mount
　Flush Mount (Optional Kit)

TrueCloud IoT Web Portal

Manage All Your CellGate Devices on One Dashboard

- Master login for multiple properties
- Login privileges with multiple user tiers
- Call group management
- Resident and visitor credential management
- Mass credential management
- Setup and management of notifications, gate hold open schedules
- Date/time logs of all gate and door access attempts, access codes used, and photos of each gate access attempt (with Advantage and Advantage Plus plans)
- Hosted by Microsoft Azure

CellGate App

Standing by for Visitors

App Available at App Store and Google Play

- Receive video/audio calls from visitors

Property Manager Can:
- Manage Resident app functions:
　- Allow residents to issue visitor QR codes
　- Allow residents to manage call groups
- Open or hold open from anywhere
- Close on demand (override holds)
- Take photos from internal cameras

Tiered Monthly Service Plans

Access Control + Voice = BASIC PLAN

Access Control + Voice + Photos = ADVANTAGE PLAN

Access Control + Voice + Photos + Video = ADVANTAGE PLAN PLUS

Contact your CellGate representative or local distributor for Tiered Plan pricing.

2 YEAR limited WARRANTY

cellgate